LSP CITY OF LINCOLN


OFFSET STATION 5' or (5') DESCRIBE WHAT THE LATH /STAKES RELATE TO: C OR F= (CUT OR FILL) -CENTERLINE PIPE -CENTERLINE INLET -BACK-OF-CURB (BC) -ETC. DESCRIBE WHAT THE C OR F RELATES TO:
-FLOWLINE PIPE -SUBGRADE -TOP-OF-SLAB SIDE OF GUARD FOR SURVEYOR NOTE. **BACK FRONT** PINK STAKING FLAG THIS SIDE FACING AWAY FROM THIS SIDE FACING TOWARDS THE UTILITY, PAVEMENT, CURB LINE, ETC. BEING OFFSET

THE UTILITY, PAVEMENT, CURB LINE, ETC. BEING OFFSET

## SURVEY GUARD

NOTES: SURVEYOR TO PAINT GUARD WHERE THEY CHOOSE. RED FOR ELECTRICAL AND SIGNALS ORANGE FOR COMMUNICATION BLUE FOR WATER
GREEN FOR WASTEWATER AND DRAINAGE
NO PAINT FOR PAVING

SURVEYOR TO PROVIDE ALL ELECTRONIC DATA, COPY OF ELECTRONIC DATA AND COPY OF THE FIELD BOOK (IF REQUIRED). FREQUENCY FOR GUARDS SHALL BE 50' IN STRAIGHT ALIGNMENTS AND 25' ON HORIZAONTAL OR VERTICAL CURVES, UNLESS OTHERWISE REQUESTED BY CONTRACTOR. PINK IS THE ONLY ACCEPTABLE FLAG COLOR.

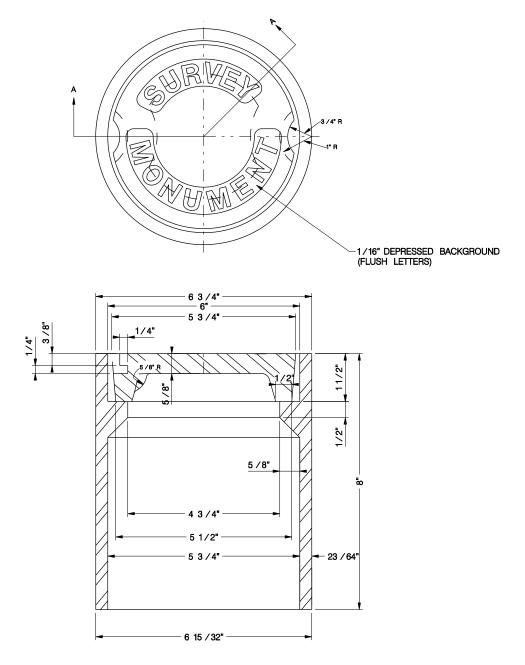

SECTION A-A

## STANDARD MONUMENT BOX

STANDARD SURVEY MONUMENT BOXES SHALL BE PLACED AT THE & OF ALL STREET INTERSECTIONS, P.C.H.C., P.R.C.H.C., P.T.H.C., AND SECTION LINES. AS SHOWN ON THE PLANS OR AS DIRECTED BY THE ENGINEER.



SURVEY MONUMENT BOX AND STAKING